

4FC5 FILTER CARTRIDGE

Cartridge Part Number: EV9693-21 (1 PK)

Cartridge Part Number: EV9693-27 (6 PK)



APPLICATIONS

- ◆ Fountain beverages
- ◆ Combination systems

CARTRIDGE DESCRIPTION

The **4FC5** replacement water filter cartridge features proprietary Fibredyne™ II media that filters sediment down to 5 microns and provides chlorine taste & odor reduction at a flow rate of 2.5 gpm for 15,000 gallons (56,781 L). This cartridge is certified under NSF/ANSI Standard 42.

FEATURES • BENEFITS


- ◆ Proprietary Fibredyne II media reduces chlorine taste & odor while providing particulate reduction down to 5 microns
- ◆ Increased capacity for extended reduction of chemical and mechanical contaminants
- ◆ Easy, quick-change cartridge replacement
- ◆ Helps protect drink system seals, pump and tubing from clogging, corrosion and abrasive wear
- ◆ Balanced cartridge for optimum performance in varying water qualities
- ◆ Reduces a range of contaminants to help ensure clearer, fresher water for consistently great-tasting beverages
- ◆ Proprietary Fibredyne™ II media inhibits the growth of bacteria on the filter media that can decrease product life
- ◆ NSF/ANSI Standard 42 certified for Bacteriostatic Effects and the reduction of Chlorine Taste & Odor and Particulate Class III

INSTALLATION TIPS

- ◆ Always flush the cartridge at time of installation and cartridge change.
- ◆ Do not exceed cartridge specifications for temperature and pressure.
- ◆ For more details, see the installation, operation, and maintenance guide included with your Pentair Everpure system.

4FC5 FILTER CARTRIDGE

EV9693-21 (1 PK) • EV9693-27 (6 PK)

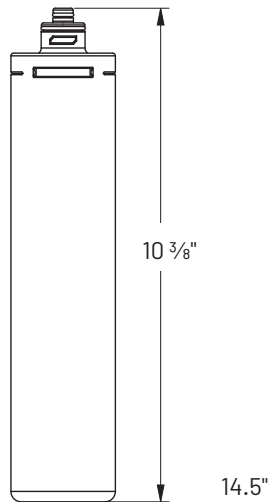

| Cartridge | Performance |
|--|--|
| Overall Dimensions Length: 10.16" (25.8 cm) Diameter: 3.25" (8.26 cm) | Service Flow Rate 2.5 gpm (9.5 lpm) |
| Operating Pressure 10 - 125 psi (0.7 - 8.6 bar) | Rated Capacity 15,000 Gallons (56,781 L) |
| Water Temperature 35 - 100°F (2 - 38°C) | Chlorine Reduction Yes |
| Shipping Weight 2 lbs (1 kg) | Taste & Odor Reduction Yes |
| | Particulate Reduction Yes |
| | Bacteriostatic Effects Yes |

Compatible with Pentair Everpure:

Coldrink, QC7I, QL2, QL3B, QL3 heads, and High Flow CSR manifolds

For Pentair Everpure Product Warranties visit:
<http://pentair.com/assets/foodservice-warranty>

It is recommended that filter cartridges be replaced every six (6) months on a regular scheduled program, or when capacity is reached or if water pressure or flow to equipment becomes inadequate.

Always replace filter cartridges at least once per year.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.



System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

STANDARD NO. 42 – AESTHETIC EFFECTS
Bacteriostatic Effects
Chemical Reduction
Taste & Odor
Chlorine
Mechanical Filtration
Nominal Particulate Class III



United States | 1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | cseverpure@pentair.com | foodservice.pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2023 Pentair. All Rights Reserved.

EV9693-21-27 AP23